



**Exhaust Hose:
Type DSS**



Design: Round, double interlocked special profile

Material:

- Stainless steel Strip 1.4301 (AISI 304), 1.4571, 1.4828
- Special materials on request.

Characteristics:

- Excellent durability.
- High tensile and bending strength.
- High resistance against pressure, impact and mechanical stress.
- Excellent absorption of axial, lateral and angular vibrations.
- Highest gas-tightness and flexibility plus additional protection of exterior contamination.
- Nearly gastight, high flexibility and additional protection against outer soiling.

Applications:

- Used as decoupling element in On- and Off-Road vehicles.

Delivery:


- According to customers' requirements

Contact: Westfalia Metal Hoses GmbH
Am Schwanenweiher 1
57271 Hilchenbach
Germany
eMail: info-wsh@westfalia-mh.com
Phone: +49 2733 283 100



Technical Data

Order-NO.	Dimension		Weight compressed length +/- 10%
	Inner-Ø	Outer-Ø	
	[mm]	[mm]	[kg/m]
S61077	77,0	81,5	2,920
S61090	90,0	94,5	3,400
S61102	102,5	107,0	3,850
S61110	110,0	114,5	4,140
S61115	115,0	119,5	4,320
S61120	120,0	124,5	4,510
S61127	127,5	132,0	4,780
S61130	130,0	134,5	4,880
S61140	140,0	144,5	5,250
S61150	150,0	154,5	5,610

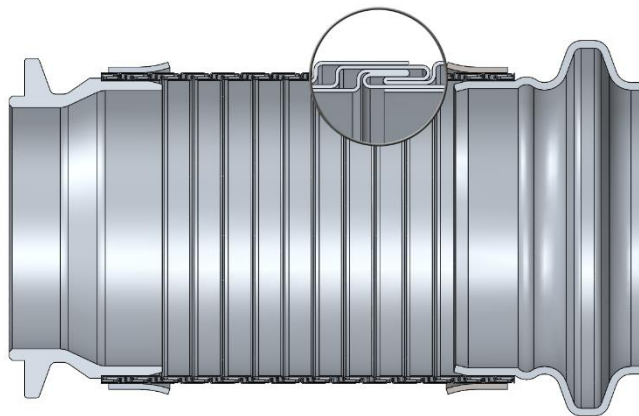

Technical parameters according to customers' requirement. Tolerances on request. Technical data subject to modifications.